

Multi-Objective Task Assignment Solution for Parked Vehicular Computing

Jia He Sun
School of Computing
Queen's University
Kingston, Canada
20jhhs@queensu.ca

Salimur Choudhury
School of Computing
Queen's University
Kingston, Canada
s.choudhury@queensu.ca

Kai Salomaa
School of Computing
Queen's University
Kingston, Canada
salomaa@queensu.ca

Abstract—With significant advances in recent technology, computational power must meet new demands. As a result, Multi-access Edge Computing (MEC) is a new networking paradigm that has received a surge in interest from both academia and industry. MEC aims to push powerful computing and storage capabilities from remote cloud servers to up-close edge servers. Vehicular Edge Computing (VEC), a subfield of MEC, has been introduced to specifically increase the computing capacity of vehicular networks, an essential component for the development of Intelligent Transportation Systems (ITS). A problem in the current development of VEC is the high cost of installing enough edge servers to compute all offloaded tasks at peak hours. However, we have observed that parked vehicles (PVs) are a rich reserve of underutilized computing resources, and their incorporation into the VEC network could lead to a solution to the aforementioned problem. This paper proposes a task offloading system with an assumed parking time estimation mechanism. Then, a novel formulation of the task offloading problem is presented that minimizes both task delay and wireless channel load. Finally, a matching based heuristic is proposed and evaluated at various configurations of the VEC environment.

Index Terms—heuristic, intelligent vehicles, multi-access edge computing, task assignment

I. INTRODUCTION

Cloud computing is at the forefront of computing paradigms by centralizing main computing and storage capabilities in a remote location that is accessible to all [9]. However, with the vision of the Internet of Things (IoT), we have realized that the remote network system is simply not enough to satisfy the intensive computational needs of the future that we envision [4] [8]. Thus, MEC has been pushed forward as a replacement system since it provides high computational power closer to users, thereby reducing latency [15] [16]. This is especially important in vehicles as the vehicular environment requires incredibly low latency due to its dynamic nature [2]. Furthermore, since it is financially infeasible to mass install expensive computing hardware into every vehicle, edge computing has become the foremost solution in vehicular networks [7].

Vehicular Edge Computing (VEC) aims to use roadside edge servers to augment the computing capacity of vehicular environments [19]. Under this framework, smart vehicles can reliably offload their computational tasks, alleviating the heavy burden placed on the vehicles' internal hardware [17] [18]. There are three layers included in this model: the Cloud

layer (cloud computing servers), the MEC layer (RSU or roadside units), and the User layer (vehicle devices). The key advantages of VEC over Vehicular Cloud Computing (VCC) are: low latency, mobility support, real-time communication, heterogeneous device support, and lower cost of development. Although it is not without drawbacks: limited capacity and lower computing capability [9].

A current problem in VEC is the high cost of installing enough edge servers to compute all offloaded tasks at peak hours [9]. However, researchers have observed that parked vehicles (PVs) are a rich reserve of underutilized computing resources [1]. Thus, their incorporation into the VEC network could lead to a solution to the aforementioned problem. Research in this area is called Parked Vehicular Computing (PVC).

However, there exist some challenges that should be addressed to facilitate PVC. Firstly, scheduling computational tasks on participating PVs poses an interesting challenge [14]. PVs have an inherent problem in that they may leave unexpectedly, perhaps in the middle of a task, which results in the system having to offload the interrupted task elsewhere, delaying it further. Secondly, the VEC network mainly communicates over wireless channels and the overuse of such channels would cause an overload, thereby decreasing the quality of existing communications [13]. There are also security and privacy challenges, but these lie outside the scope of this paper [20] [21] [22] [23].

Huang et al. [5] designed an interactive protocol with basic request and response operations for service provision in PVC. Then, they solve the resource scheduling optimization problem using a Stackelberg game approach. Ge et al. [3] proposed an efficient SEA algorithm to solve the vehicle selection and task assignment problem regarding service migration, namely, the transfer of tasks between base stations.

Wang et al. [12] implemented a system-level simulator of LTE Sidelink C-V2X Communication for 5G. This simulation showed that the volume of data severely increased as the number of users in the network increased. The packet reception ratio (PRR) also drastically decreased as the network size grew, reaching as low as 80.36% in a 1,920 user setting. As VEC is expected to be implemented on scales much larger than that, it is essential to maintain the quality of communication

in these settings.

However, there are currently very few works that address the potential issues of large-scale implementation, specifically in terms of wireless communications. The current paradigm for wireless communication in vehicular networks is C-V2X, which has strict requirements on Quality of Service (QoS) such as high reliability and low latency [6]. Therefore, it is necessary for VEC networks to not only provide reliable high-speed service but also to maintain the quality of the communication channels used.

In this paper, we propose a many-to-one stable matching algorithm to assign tasks to vehicles in such a way that not only minimizes task delay but also maintains the quality of the wireless communication channels. Stable matching is chosen since we are facing a multi-objective problem. Stable matching allows both the set of vehicles and the set of tasks to have preference rankings over the other set which can accurately represent both objectives of the problem.

The main contributions of this paper are summarized as follows:

- To reflect the multifaceted problem of task assignment within a VEC environment, we propose a novel formulation that includes a weighted multi-objective that aims to minimize both task delay and wireless channel load. We then prove the NP-completeness of the problem.
- We propose a many-to-one stable matching based heuristic to efficiently assign tasks to vehicles.
- We evaluate and confirm the performance of the proposed heuristic through various simulations.

The work done in this paper is included as part of Jia He Sun's master thesis with Queen's University [25].

II. SYSTEM MODEL

We consider one cell which has one BS, M users, and N PVs with available computing resources. During high usage hours, the BS will be overloaded and unable to complete all of the tasks offloaded to it by the users. Then, it will have to offload K tasks to nearby PVs. The time-slot model is adopted where the set of tasks and PVs remain fixed within each time slot while varying across different slots. Therefore, in each time slot we have defined the following variables (it is assumed that this information will be available to the scheduling system):

- N = number of vehicles
- K = number of tasks
- p_i = computational power offered by vehicle i
- t_i = parking time estimation of vehicle i (the assumption of having knowledge of this variable will be discussed)
- w_j = computational power required for task j
- l_{ji} = task completion speed of task j if assigned to vehicle i

To summarize the system model, the task assignment problem can be described as assigning K tasks to N vehicles where each task is assigned to only one vehicle, each vehicle can be assigned multiple tasks but cannot exceed their computational

capacity, assigned tasks' computation time should not exceed their vehicle's estimated parking time.

A. Problem Formulation

Now, we will formulate the task assignment problem as a weighted multi-objective ILP.

$$\text{minimize}_{x,y} \quad \alpha \sum_{j=1}^K \sum_{i=1}^N x_{ji} l_{ji} + \beta \sum_{i=1}^N y_i \quad (1a)$$

subject to

$$\sum_{i=1}^N x_{ji} = 1, \quad j = 1, \dots, K, \quad (1b)$$

$$\sum_{j=1}^K w_j x_{ji} \leq p_i y_i, \quad i = 1, \dots, N, \quad (1c)$$

$$\sum_{j=1}^K l_{ji} x_{ji} \leq t_i, \quad i = 1, \dots, N, \quad (1d)$$

$$y_i \in \{0, 1\} \quad i = 1, \dots, N, \quad (1e)$$

$$x_{ji} \in \{0, 1\} \quad j = 1, \dots, K, i = \dots, N \quad (1f)$$

1) *Variables*: The two variables in the formulated ILP are:

- $x_{ji} = 1$ if task j is assigned to vehicle i and 0 otherwise
- $y_i = 1$ if vehicle i is assigned at least one task and 0 otherwise

2) *Constraints*: The constraints can be summarized as follows:

- (2b): each task is assigned to only one vehicle.
- (2c): the assigned tasks cannot go over vehicle's max load.
- (2d): the task for each vehicle must be able to finish before the vehicle leaves.
- (2e): $y_i = 1$ if vehicle i is assigned a task and 0 otherwise (integrality constraint).
- (2f): $x_{ji} = 1$ if task j is assigned to vehicle i and 0 otherwise (integrality constraint).

3) *Objective*: Firstly, α and β are constant objective weights. Their values decide which objective should be prioritized. The first objective is to minimize the task completion time which is crucial in a VEC task assignment environment. The task completion time consists of two parts: computation time, and transmission time (both ways). For a particular task, its computation time, l_{ji}^{comp} , depends on the vehicle it is assigned to, so l_{ji}^{comp} is the amount of time it takes vehicle i to compute task j . For the transmission time of a task, l_{ji}^{trans} , it depends on the transmission power of the BS. Then, total task completion speed is the computation time plus the transmission time as shown in Equation II-A3.

$$l_{ji} = l_{ji}^{comp} + l_{ji}^{trans} \quad (2)$$

The second objective is the number of vehicles used for task assignment. This is because the deployment of tasks

and any other form of information between the VEC base station and the parked vehicles will be done through wireless channels which are limited in size. To maintain the quality of communication on these wireless channels, especially in highly populated metropolitan areas, the number of vehicles used is also minimized.

Theorem 1: (NP-Complete) The formulated ILP is NP-Complete.

Proof. Consider the corresponding decision version of this problem. That is, given M , is there a task assignment that is within the defined constraints that has an objective value $\leq M$? Certificate: A certificate would be an assignment of tasks to the vehicles denoted by the (K, N) matrix x where $x_{ji} = 1$ if task j is assigned to vehicle i and 0 otherwise. To verify this certificate, we would need to check that the assignment satisfies each constraint and calculate the objective value, that is:

- 1) First obtain vector y from x where $y_i = 1$ if vehicle i has a task and 0 otherwise
- 2) Verify each task is assigned to only 1 vehicle
- 3) Verify assigned tasks do not go over vehicle's max load
- 4) Verify the assigned tasks finish before the vehicle has to leave

This would take $O(NK)$ time, which means verifying a solution is polynomial. We will now show that bin packing reduces to the formulated ILP [24]. First set the objective weights $\alpha = 0$ and $\beta = 1$. Then, set all $p_i = B$, where B can be any constant. Then set all l_{ji} and $t_i = 0$. Then the optimization problem becomes:

$$\underset{x, y}{\text{minimize}} \quad \sum_{i=1}^N y_i \quad (3a)$$

subject to

$$\sum_{i=1}^N x_{ji} = 1, \quad j = 1, \dots, K, \quad (3b)$$

$$\sum_{j=1}^K w_j x_{ji} \leq B y_i, i = 1, \dots, N, \quad (3c)$$

$$y_i \in \{0, 1\} \quad i = 1, \dots, N, \quad (3d)$$

$$x_{ji} \in \{0, 1\} \quad j = 1, \dots, K, i = \dots, N \quad (3e)$$

Notice that this is an exact formulation of the bin packing problem where w_j is the size of item j and B is the capacity of each bin. The decision bin packing problem is known to be NP-complete. Thus, the decision version of our optimization problem is NP-complete. Therefore, our optimization problem is NP-complete.

III. PROPOSED SOLUTION

The heuristic proposed is a stable matching based algorithm. The algorithm it is based on has several names including: "Extended Gale-Shapley algorithm", "the Capacitated Gale-Shapley algorithm", "the Roth-Shapley algorithm", and "the deferred acceptance algorithm". Following, it will be referred

to as the RS algorithm [10]. The proposed heuristic is a version of the RS algorithm that is modified to fit the dynamic nature of the PVC environment. The assignment of tasks to vehicles can be described as a many-to-one matching.

Definition 1 (Matching): A matching A is a mapping from the set of tasks T to the set of vehicles V , $T \rightarrow V$, which satisfies all of the following:

- for any task $j \in T$, $|A(j)| \leq 1$
- for any task $j \in T$, and any vehicle $i \in V$, $A(j) = i$ if and only if $j \in A(i)$

The proposed algorithm requires both sets V and T to have preference rankings over each other. That is, for all $i \in V$, i must have a preference ranking including all $j \in T$ and vice versa.

Definition 2 (Preference Ranking): For any vehicle $i \in V$, its preference ranking is a list L including all tasks in T . If task $j \in T$ comes before task $j' \in T$ in L , we say that vehicle i prefers task j to task j' . For tasks in T , their preference rankings are defined vice versa.

How these rankings are to be computed are discussed later in this section. Next, we will define a stable matching, but first we will define two types of blocking pairs.

Definition 3 (Type 1 Blocking Pair): Given a matching A , $(j, i) \in (T, V)$ forms a type 1 blocking pair if all of the following conditions hold:

- task j prefers vehicle i over $A(j)$
- there exists task k with vehicle $i \in A(k)$ such that vehicle i prefers task j to task k and the removal of task k allows the assignment of task k onto vehicle i

The existence of a type 1 blocking pair $(j, i) \in (T, V)$ in a given matching A is unstable since it means that task j can be assigned to a more preferred vehicle and vehicle i can be assigned a more preferred task at the cost of a less preferred task. Apart from the type 1 blocking pair, there is also the type 2 blocking pair.

Definition 4 (Type 2 Blocking Pair): Given a matching A , $(j, i) \in (T, V)$ forms a type 2 blocking pair if all of the following conditions hold:

- task j prefers vehicle i over $A(j)$
- vehicle i has enough resources to be assigned task j

The existence of a type 2 blocking pair $(j, i) \in (T, V)$ in a given matching A is unstable since vehicle i is wasteful by not making full use of its resources.

Definition 5 (Stable Matching): Given a matching A , A is a stable matching if and only if there are no type 1 or type 2 blocking pairs.

A. Algorithm Design

A key characteristic of the RS algorithm is the preference ranking made by both parties. Since the preference ranking by either party is made independent of the other, they can be made to represent different objectives which is a desired trait in multi-objective problems such as the one discussed in this paper. The crux of the RS algorithm is how the preference rankings are formulated. For the algorithm to be effective,

the preference rankings must be a good reflection of the optimization objectives.

- Preference ranking for tasks: prefer vehicles with the most tasks, tie breaks between vehicles by which vehicle completes said task faster. Task j prefers vehicle n over vehicle k if $\sum_{i=1}^K x_{in} > \sum_{i=1}^K x_{ik}$.
- Preference ranking for vehicles: prefer tasks that complete the fastest on said vehicle. Vehicle i prefers task a over task b if $l_{ai} < l_{bi}$.

The preference ranking for tasks aims to primarily minimize the number of vehicles used which decreases the load on the wireless channels. The preference ranking for vehicles aims to primarily minimize the task completion speed. Together, these two preference mechanics accurately represent the two objectives of the ILP formulated in the previous section.

Consider another matching algorithm, bipartite matching, where the optimization objective is represented only by edge weights. It is extremely difficult to formulate an accurate representation of both objectives when confined to a single form. In our case, it is especially difficult to represent the second objective, number of vehicles used, in such a way since it means we are minimizing the number of nodes covered in a bipartite matching. Hence, we can easily observe the motivation behind designing a heuristic based on the RS algorithm.

The proposed algorithm based on the RS algorithm is deployed to produce a stable matching. The proposed algorithm runs as follows: (The pseudocode is given in Algorithm 1):

- 1) Put all tasks into a list called unmatched. Go to 2.
- 2) Update preference rankings for vehicles. Go to 3.
- 3) Update preference ranking for tasks. Take any task in unmatched, j , and go to 4. If none, end algorithm.
- 4) Consider task j 's most preferred vehicle, i . Go to 5. If task j has no preferred vehicle remaining, remove task j from unmatched list and go to 3.
- 5) If vehicle i can accommodate task j (has enough computational power and time). Match task j to vehicle i and go to 3. If vehicle i does not have enough time remaining, remove vehicle i from task j 's preferences and go to 4. If vehicle i does not have enough computational power, go to 6.
- 6) Consider all vehicle i 's currently matched tasks. Then of these tasks, consider the set of tasks that vehicle i prefers less than task j , call it U . Iterate through U from least preferred to most preferred. If unmatching task k allows vehicle i to have enough resources to be assigned task j , then unmatch task k and match task j . Then remove vehicle i from task k 's preference ranking and go to 3. If not, then remove vehicle i from task j 's preference and consider task j 's next most preferred vehicle and go to 5.

B. Algorithm Analysis

First, we will analyze the output of the algorithm.

Algorithm 1 Pseudocode of the proposed RS Based Heuristic

Require: preference ranking for both vehicles and tasks

```

0: while there are unmatched tasks do
0:   for any unmatched task  $j$  do
0:     update preference ranking of each task
0:      $i \leftarrow$  task  $j$ 's most preferred vehicle
0:     if  $p_i \geq w_j$  then
0:       assign task  $j$  to vehicle  $i$ 
0:       break
0:     end if
0:     if  $l_{ji} > t_i$  then
0:       remove vehicle  $i$  from task  $j$ 's preferences
0:       break
0:     end if
0:     if  $p_i > w_i$  then
0:        $U \leftarrow$  tasks currently matched to vehicle  $i$  that is
less preferred
0:       than task  $j$  in order from least preferred to most
preferred
0:       for task  $k \in U$  do
0:         if unmatching task  $k$  allows assignment of task
 $j$  then
0:           unmatch task  $k$  and assign task  $j$  to vehicle  $i$ 
0:           remove vehicle  $i$  from task  $k$ 's preference
ranking
0:           break
0:         end if
0:       end for
0:       remove vehicle  $i$  from task  $j$ 's preference ranking
0:     end if
0:   end for
0: end while=0

```

Lemma 2 (No Type 1 Blocking Pairs): The proposed algorithm produces a matching A that has no type 1 blocking pairs.

Proof. Suppose for contradiction that produced matching A has type 1 blocking pair $(j, i) \in (T, V)$. Then, consider the point in the algorithm at which task j was assigned to vehicle $l = A(j)$. Since task j prefers vehicle i over vehicle l , that is $\sum_{i=1}^K x_{jl} > \sum_{i=1}^K x_{ji}$, vehicle i must have been considered before vehicle l . Then, vehicle i must have rejected task j at this point which means for all tasks k with $A(k) = i$ either of the following is true: no tasks who is assigned to vehicle i is less preferred than task j , or $p_i + w_k < w_j$. Then vehicle i would have been removed from task j 's preferences. This contradicts the assumption that task j prefers vehicle l over vehicle i . Therefore, the matching A cannot have a type 1 blocking pair $(j, i) \in (T, V)$.

Lemma 3 (No Type 2 Blocking Pairs): The proposed algorithm produces a matching A that has no type 2 blocking pairs.

Proof. Suppose for contradiction that produced matching A has type 2 blocking pair $(j, i) \in (T, V)$. Then, consider the point in the algorithm at which task j was assigned to

TABLE I
EXPERIMENT VARIABLES

Variables	Experiment Settings
p_i	random between 20-25
t_i	random between 15-30
w_j	random between 4-5
l_{ji}	random between 1-20

vehicle $l = A(j)$. Since task j prefers vehicle i over vehicle l , that is $\sum_{i=1}^K x_{jl} > \sum_{i=1}^K x_{ji}$, vehicle i must have been considered before vehicle l . Then, it must be that vehicle i rejected task j which means $p_i < c_j$ or $t_i < l_{ji}$. Then vehicle i would have been removed from task j 's preferences which is a contradiction to the assumption of the existence of type 2 blocking pair (j, i) .

Theorem 4 (Stable Matching): The proposed algorithm produces a stable matching A .

Proof. According to Lemma 1 and Lemma 2, there are type 1 or type 2 blocking pairs in the produced matching A . Therefore, the produced matching is stable.

Now, we will analyze the termination condition and the complexity of the proposed algorithm.

Theorem 5 (Termination): The proposed algorithm terminates after at most NK iterations.

Proof. First, notice that in each iteration of the algorithm, a task is either matched to a vehicle (may be after the unmatching of another task) or is removed from the algorithm. That is to say, the number of unmatched tasks never decreases in any iteration of the algorithm. Then, for an infinite loop to exist, there must be an infinite number of times where a task is unmatched from a vehicle. However, whenever a task is unmatched from a vehicle, it is removed from the vehicle's preference ranking. That is, the removed task will never be assigned to the vehicle it was once unmatched with. Therefore, there can be at most NK number of unmatchings and thus, an infinite loop is impossible and the algorithm is guaranteed to terminate. Furthermore, for any given iteration, for unmatchings to occur, some task must have been assigned to some vehicle. There can be at most NK number of such assignments since each task can be assigned to each vehicle at most once. Therefore, the algorithm will take NK iterations to terminate in the worst case.

IV. EXPERIMENTAL RESULTS

There are two baseline algorithms that are used for evaluation. The first is a randomized algorithm that randomly assigns a vehicle as the "current" vehicle. Then, it will iterate through the tasks in an arbitrary order, assigning each task onto the "current" vehicle. If a task cannot fit onto the "current" vehicle, the system will choose another random vehicle as the "current" vehicle. It will be referred to as the next fit algorithm. The second baseline algorithm is the standard greedy algorithm that organizes tasks from largest to smallest, then orders the vehicles from most to least computational power offered. Then, the system will iterate through the tasks

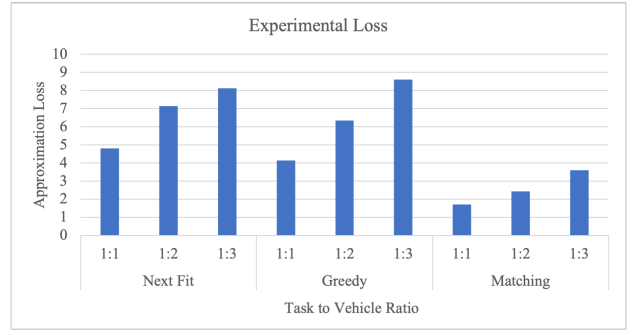


Fig. 1. Average Experimental Loss with 50 Vehicles

in order and, for each task, it will iterate through the vehicles in order until a vehicle is found able to take on the task. This algorithm is based on a greedy algorithm for the bin packing problem (the formulated problem is similar to the bin packing problem as shown by the NP-complete proof in Section 2). The complexity of these algorithms are $O(K + N)$ and $O(KN)$ respectively. Other algorithms are not chosen as there are no other works that evaluate the two objectives at the same time.

A. Approximation Loss

To evaluate how well the RS based heuristic performs, we will test its objective value against that of the optimal to find the approximation loss. However, due to the high computational demands of computing the optimal solution of an ILP at large scales, this evaluation had at most 50 vehicles. The objective weights will be 1 and 10. This evaluation will be done at three different vehicles to task ratios to emulate how busy the environment is. The three ratios are: 1:1 (abundance of computational resources compared to tasks); 1:2 (moderate amount of computational resources compared to tasks); and 1:3 (scarcity of computational resources compared to tasks).

The variables for the experiments are once again randomized as indicated in Table I To minimize the effect of the randomized variables, each instance of the experiment was ran 20 times and the averaged results of the approximation loss experiment are displayed in Fig. 1. The y-axis represents how far from the optimum the results are. For example, the matching algorithm (1:1) gives a solution that is 1.7 times the optimum. Evident in these results, the matching algorithm performs significantly better than the other two algorithms, especially in settings with more tasks. Comparing different task to vehicle ratios, more tasks correlate to worse performance. This is to be expected as it is much more difficult to assign tasks optimally when computational resources are more limited.

B. Large Scale Experimentation

To examine the performance of the RS based heuristic at a large scale, several experiments on various settings were performed and evaluated against the two baseline algorithms. The same three different vehicle to task ratios were tested (1:1, 1:2, 1:3). Two different pairs of objectives weights

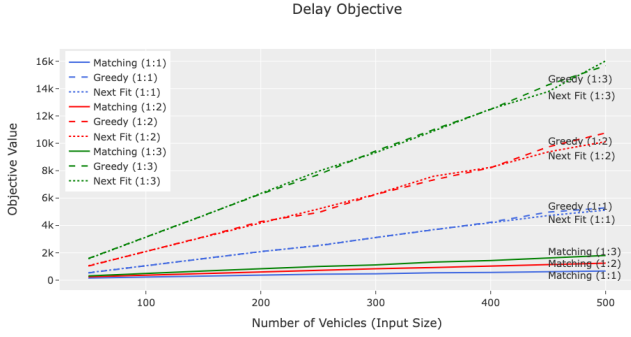


Fig. 2. Objective Weights $\alpha = 1, \beta = 10$, Delay Objective

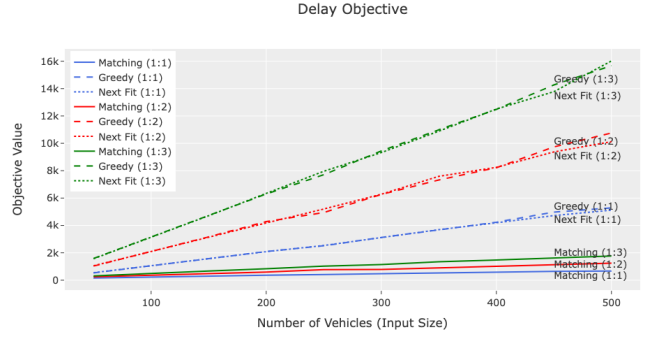


Fig. 4. Objective Weights $\alpha = 1, \beta = 100$, Delay Objective

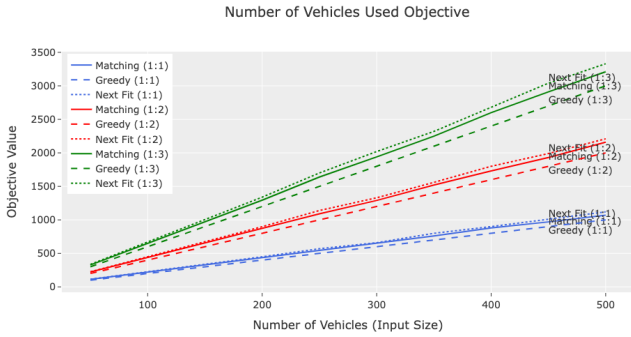


Fig. 3. Objective Weights $\alpha = 1, \beta = 10$, Number of Vehicles Used Objective

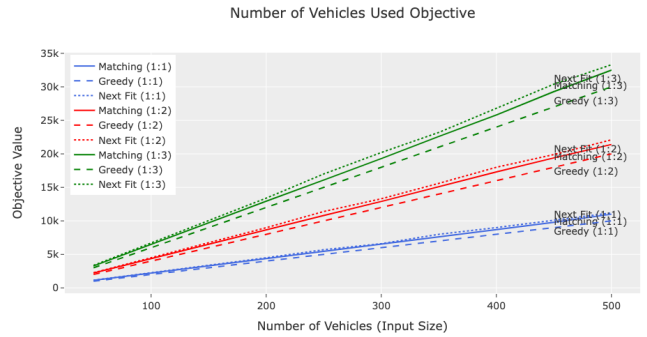


Fig. 5. Objective Weights $\alpha = 1, \beta = 100$, Number of Vehicles Used Objective

were tested. These different objective weights are designed to emulate different valuations of the objectives (the first number is the weight of the delay objective α and the second number is the weight of the “number of vehicles used” objective β): (1, 10) - for situations where we mostly care about delay and not about the number of vehicles used, and (1, 100) - for situations where we mostly care about the number of vehicles used.

Each experiment will be run on a scale from 50 vehicles to 500 vehicles at intervals of 50 using all three algorithms. The two different objectives are evaluated separately. The variables for the experiments are once again randomized as indicated in Table I. To minimize the effect of the randomized variables, the experiment was performed 20 times. The CV was at most 0.15, indicating very low variance in the data sample. Furthermore, any particular data point was at most 31% away from the mean. Therefore, it is reasonable to conclude that the randomness of the initialized variables has little impact on the result of the experiments. The experimental results for objective weights (1, 10) are displayed in Fig. 2 and Fig. 3. In this case, where the delay objective dominates the number of vehicles used objective, the RS based matching algorithm performs significantly better in terms of delay while performing similarly to the other two algorithms in terms of the number of vehicles used.

In the second case, where the number of vehicles used objective has weight 100, the simulation results are displayed

in Fig. 4 and Fig. 5. Again, the proposed RS based algorithm outperforms the other two algorithms by a large margin while performing similarly in terms of the other objective.

Another simulation is performed where the vehicle to task ratio is 1:5 to replicate an extremely busy environment where most vehicles need to be used. Fig. 6 displays the results of this simulation. We can see that, on average, the proposed RS based algorithm performs slightly better than the two baseline algorithms. In this type of setting, where most available vehicles need to be used, assigning the right tasks to the right vehicles becomes increasingly important. Therefore, the RS based algorithm’s performance in the number of vehicles used objective is slightly better than the other two baseline algorithms while still performing significantly better in the delay objective.

V. CONCLUSION

This paper proposes a formulation of the task assignment problem in the PVC environment as a weighted multi-objective optimization problem that aims to minimize both task delay and wireless channel load. Then, a heuristic based on the RS algorithm is proposed and evaluated against two other baseline algorithms on various simulation settings on a scale of up to 500 vehicles and 1,500 tasks.

The formulation of the optimization problem is a key area. Currently, only the total task completion speed is measured in

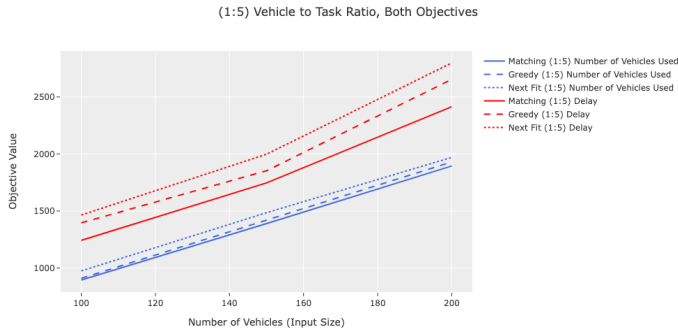


Fig. 6. Objective Weights $\alpha = 1, \beta = 10$, Both Objectives

terms of delay as it is the simplest measure of delay. However, practically speaking, there may be deadlines imposed on certain tasks. Then, a deadline constraint would have to be added. We could also incorporate deadlines and ignore how fast the tasks are done as long as they are done before their deadline. Furthermore, the transmission delay is part of the total delay objective in the formulation. However, that is related to the state of the wireless channels, which is related to the number of vehicles in use. So, perhaps the objective function could have the transmission delay be dependent on the number of vehicles used.

Secondly, only a general formulation of an incentive mechanism is proposed in this paper. Future work could include a formal formulation of such a mechanism and evaluating the ability of the incentive mechanism to provide accurate remaining parking time estimates through various simulations. This should then be compared against the effectiveness of remaining parking time estimation via statistical modeling. Another extension would be designing a hybrid solution using both statistical analysis and incentivized user submissions.

VI. ACKNOWLEDGMENT*

We thank Dr. Sameh Sorour for his help in developing the system model presented in this paper.

REFERENCES

- [1] S. Arif, S. Olariu, J. Wang, G. Yan, W. Yang, I. Khalil. Datacenter at the airport: Reasoning about time-dependent parking lot occupancy. *IEEE Transactions on Parallel and Distributed Systems* 23(11), 2067–2080 (2012)
- [2] A.B. De Souza, P.A.L. Rego, T. Carneiro, J.D.C. Rodrigues, P.P.R. Filho, J.N. De Souza, V. Chamola, V.H.C. De Albuquerque, B. Sikdar. Computation offloading for vehicular environments: A survey. *IEEE Access* 8, 198214–198243 (2020)
- [3] S. Ge, M. Cheng, X. He, X. Zhou. A two-stage service migration algorithm in parked vehicle edge computing for internet of things. *Sensors* 20(10) (2020)
- [4] H. Guo, J. Liu, J. Zhang, W. Sun, N. Kato: Mobile-edge computation offloading for ultradense iot networks. *IEEE Internet of Things Journal* 5(6), 4977–4988 (2018)
- [5] X. Huang, R. Yu, J. Liu, L. Shu. Parked vehicle edge computing: Exploiting opportunistic resources for distributed mobile applications. *IEEE Access* 6, 66649–66663 (2018)
- [6] L. Ji, A. Weinand, B. Han, H.D. Schotten. Multi-rats support to improve V2X communication. In: 2018 IEEE Wireless Communications and Networking Conference, WCNC 2018 (2018)

- [7] L. Liu, C. Chen, Q. Pei, S. Maharjan, Y. Zhang. Vehicular edge computing and networking: A survey. *Mobile Netw Appl* (2020)
- [8] Y. Mao, C. You, J. Zhang, K. Huang, K.B. Letaief. A survey on mobile edge computing: The communication perspective. *IEEE Communications Surveys Tutorials* 19(4), 2322–2358 (2017)
- [9] S. Raza, S. Wang, M. Ahmed, M.R. Anwar. A survey on vehicular edge computing: Architecture, applications, technical issues, and future directions. *Wirel. Commun. Mob. Comput.* 2019, 3159762–1315976219 (2019)
- [10] A.E. Roth. Deferred acceptance algorithms: History, theory, practice, and open questions. *international Journal of game Theory* 36(3), 537–569 (2008)
- [11] T.H. Thi Le, N.H. Tran, Y.K. Tun, O. Tran Thi Kim, K. Kim, C.S. Hong. Sharing incentive mechanism, task assignment and resource allocation for task offloading in vehicular mobile edge computing. In: *NOMS 2020 - 2020 IEEE/IFIP Network Operations and Management Symposium*, pp. 1–8 (2020)
- [12] D. Wang, R.R. Sattiraju, A. Weinand, H.D. Schotten. System-level simulator of LTE sidelink C-V2X communication for 5g. *CoRR abs/1904.07962* (2019)
- [13] M. Whaiduzzaman, M. Sookhak, A. Gani, R. Buyya. A survey on vehicular cloud computing. *Journal of Network and Computer Applications* 40, 325–344 (2014)
- [14] K. Zhang, Y. Mao, S. Leng, S. Maharjan, A. Vinel, Y. Zhang. Contract-theoretic approach for delay constrained offloading in vehicular edge computing networks. *Mob. Networks Appl.* 24(3), 1003–1014 (2019)
- [15] W. Shuo, X. Zhang, Y. Zhang, L. Wang, J. Yang, and W. Wang. "A survey on mobile edge networks: Convergence of computing, caching and communications." *Ieee Access* 5 (2017): 6757-6779.
- [16] Y. Wang, M. Sheng, X. Wang, L. Wang, and J. Li. "Mobile-edge computing: Partial computation offloading using dynamic voltage scaling." *IEEE Transactions on Communications* 64(10), (2016): 4268-4282.
- [17] G. Qiao, S. Leng, K. Zhang, and Y. He. "Collaborative task offloading in vehicular edge multi-access networks." *IEEE Communications Magazine* 56(8), (2018): 48-54.
- [18] J. Du, F. Yu, X. Chu, J. Feng, and G. Lu. "Computation offloading and resource allocation in vehicular networks based on dual-side cost minimization." *IEEE Transactions on Vehicular Technology* 68(2), (2018): 1079-1092.
- [19] R. Menegutte, R. De Grande, J. Ueyama, G. P. Rocha Filho, and E. Madeira. "Vehicular Edge Computing: Architecture, Resource Management, Security, and Challenges." *ACM Computing Surveys (CSUR)* 55(1), (2021): 1-46.
- [20] L. Ma, X. Liu, Q. Pei, and Y. Xiang. "Privacy-preserving reputation management for edge computing enhanced mobile crowdsensing." *IEEE Transactions on Services Computing* 12(5), (2018): 786-799.
- [21] J. Wei, X. Wang, N. Li, G. Yang, and Y. Mu. "A privacy-preserving fog computing framework for vehicular crowdsensing networks." *IEEE Access* 6 (2018): 43776-43784.
- [22] J. Kang, R. Yu, X. Huang, and Y. Zhang. "Privacy-preserved pseudonym scheme for fog computing supported internet of vehicles." *IEEE Transactions on Intelligent Transportation Systems* 19(8), (2017): 2627-2637.
- [23] D. Huang, S. Misra, M. Verma, and G. Xue. "PACP: An efficient pseudonymous authentication-based conditional privacy protocol for VANETs." *IEEE Transactions on Intelligent Transportation Systems* 12(3), (2011): 736-746.
- [24] W. Cook, L. Lovász, P.D. Seymour. (Eds.). (1995). *Combinatorial optimization: papers from the DIMACS Special Year (Vol. 20)*. American Mathematical Soc.
- [25] J. H. Sun. *Scheduling Problems in Next Generation Computing Networks*. M.Sc. Thesis, School of Computing, Queen's University, Canada, 2022.